





TERMOSTAT



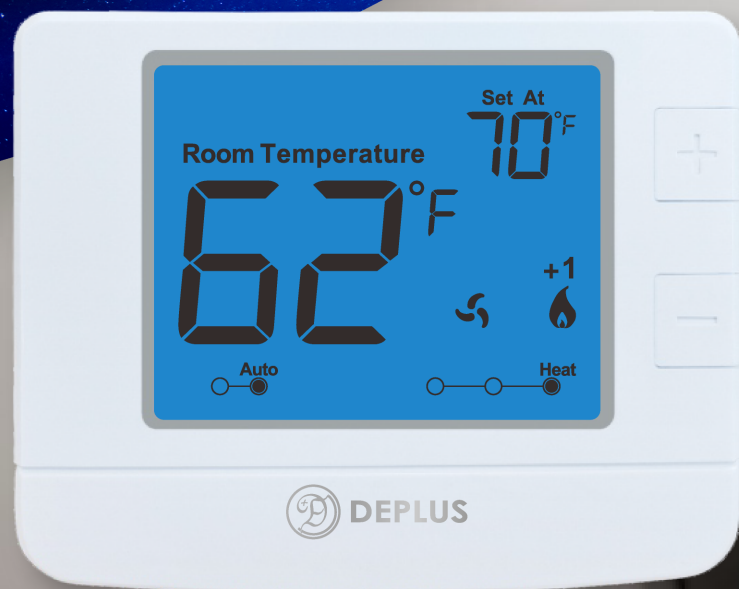

TERMOSTAT SPECIFICATION

Universal Subbase
 Separate heating and cooling
 swing (cycle rate) adjustments
 5 minute compressor delay protection
 (Selectable on or off)
 Battery or 24v power
 Easy access battery compartment
 Simple private label badge system

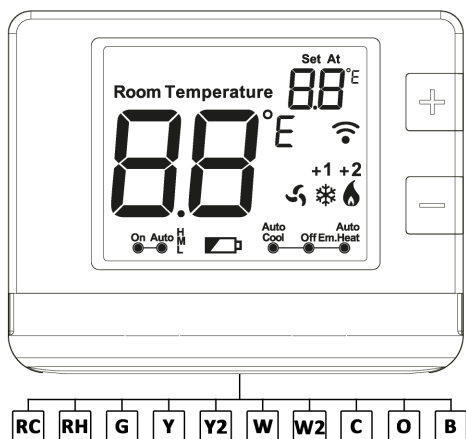

Etapa De Calor	Etapa De Frío	Programación	Batería	Cable De 24V (Terminal C)	Gas, Eléctric O Aceite	Bomba De Calor SIN Calor Aux. O De Emergencia	Bomba De Calor CON Calor Aux. O De Emergencia	Sistemas De Calefacción De Etapas Múltiples	Millivoltios	Terminales
2	2	NINGUNA	Sí	Sí	Sí	Sí	NO	Sí	Sí	Rc,Rh,C,W Y,G,B,O